

THIS IS A SINGLE FACED DROP-IN DISPLAY, TO BE MOUNTED IN A RECTANGULAR OPENING IN A LARGER SIGN.

DIMENSIONS ARE IN INCHES [MILLIMETERS].

USE HOLES IN THE FRONT FLANGES OF THE CABINET TO ATTACH THE DISPLAY TO THE SIGN FACE USING APPROPRIATE HARDWARE.

DAKTRONICS IS NOT RESPONSIBLE FOR THE MOUNTING STRUCTURE OR FOR THE ADEQUACY OF ATTACHMENT TO THE STRUCTURE. STRUCTURE AND ATTACHMENT MUST CONFORM TO ALL APPLICABLE BUILDING CODES.



THE OVERALL SIGN STRUCTURE MUST BE DESIGNED WITH SUFFICIENT VENTILATION SO THAT AIR AROUND THE DISPLAY DOES NOT EXCEED 120°F [49°C].

THE DISPLAY IS FRONT VENTILATED. NO PORTION OF THE FACE MAY BE COVERED.

SIGNAL INTERCONNECT CABLES ARE PROVIDED AND MUST BE ROUTED AND CONNECTED WHEN MULTIPLE DISPLAYS ARE INSTALLED WITHIN A SINGLE SIGN.

THIS DISPLAY IS A UL RECOGNIZED COMPONENT.


REFER TO THE DISPLAY MANUAL FOR COMMUNICATION OPTIONS AND INSTALLATION INSTRUCTIONS.

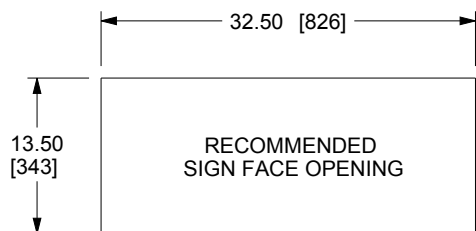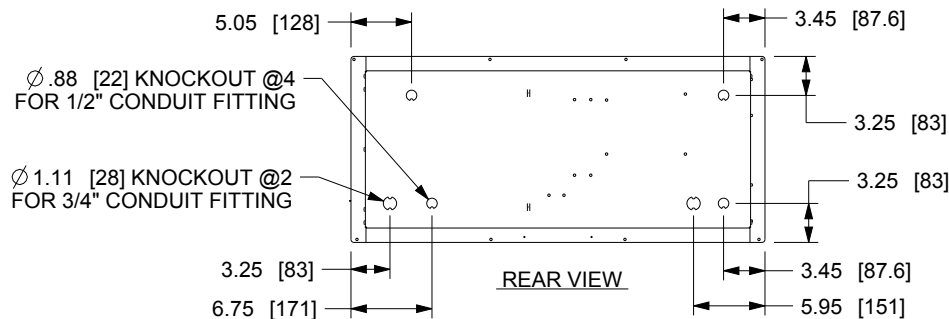

FEATURE	
DIGIT HEIGHT	12" [305 MM]
DIGIT LED COLOR	RED, AMBER, OR GREEN
CABINET COLOR	SEMI-GLOSS BLACK
SERVICE ACCESS	FRONT ONLY
CABINET MATERIAL	0.050 [1.3] ALUMINUM SHEET
EST. WEIGHT	20 LB [10 KG]
MAX. OPER. TEMP.	120°F [49°C]
PRIMARY VOLTS	100V - 240V AC
MAX. POWER	50 W



THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2016 DAKTRONICS, INC. (USA)



03	05 AUG 2016	REDUCED FLANGE WIDTHS BY 0.250". MAKING OVERALL DIMENSIONS SMALLER BY 0.50" [12.7 MM].	AVB 116
02	07 MAY 13	REVISED TEMPERATURE RATINGS.	AVB
01	05 JUN 12	UPDATED WEIGHT.	AVB
REV	DATE:		BY:

PROJECT: FUELIGHT DISPLAYS			
TITLE: SHOP DRAWING, FL-3000-12-DI			
DATE: 05-AUG-16	DIM UNITS: INCHES [MILLIMETERS]	SHEET	REV
SCALE: 3/50	DO NOT SCALE DRAWING	1 OF 1	03
DESIGN: A VANBEMMEL	JOB NO.	FUNC - TYPE - SIZE	
DRAWN: A VANBEMMEL	P1611	R - 08 - A	1086409