DIMENSIONS	WEIGHT	POWER (120 VAC)
4.25" H x 16.25" W x 9" D (108 mm, 413 mm, 229 mm)	7 lb (3.2 kg)	6 W

DISPLAY

A 32-character liquid crystal display (LCD) prompts the operator and provides vital feedback. Two lines of 16 characters provide easy viewing of game in progress information. The LCD is backlit with LEDs to allow for readability in dark areas as well as bright sunlight.
- Viewing area: 3.89" W x 0.94" H (99 mm, 24 mm)
- Characters: 0.189" W x 0.378" H (4.8 mm, 9.6 mm)

CONSTRUCTION

Heavy-duty aluminum case is the toughest line of defense against drops, static electricity, and high/low temperatures. The console's "snap-action" keyboard is sealed, making it resistant to moisture and spills. An internal beeper helps to indicate a completed keystroke.

SPORT MODES

Interchangeable sport inserts allow a single console to work for a wide variety of indoor sports. Sport inserts reduce the confusion of having multiple functions on individual keys. On most inserts, HOME keys are color-coded green and GUEST keys are red for quick identification.

NON-VOLATILE MEMORY

The most current information is automatically stored on a memory chip without the need for a battery, should there be a loss of power. The memory cannot be erased and is only overwritten once new information is entered.

PRODUCT SAFETY APPROVAL

ETL listed, tested to CSA standards and CE labeled; FCC approved

OPERATING TEMPERATURES

32° to 130° Fahrenheit (0° to 54° Celsius)

GENERAL INFORMATION

Console can control multiple scoreboards and stat panels, display tenth-of-a-second times, and features Time of Day and Segment Timer modes. Console is static electricity resistant to 20,000 volts. Specifications and pricing are subject to change without notice.

OPTIONS & ACCESSORIES

- Durable carrying case (see SL-04551)
- 2.4 GHz spread spectrum radio control (see SL-04370)
- Handheld shot clock controllers
- External battery kit (see SL-04457)
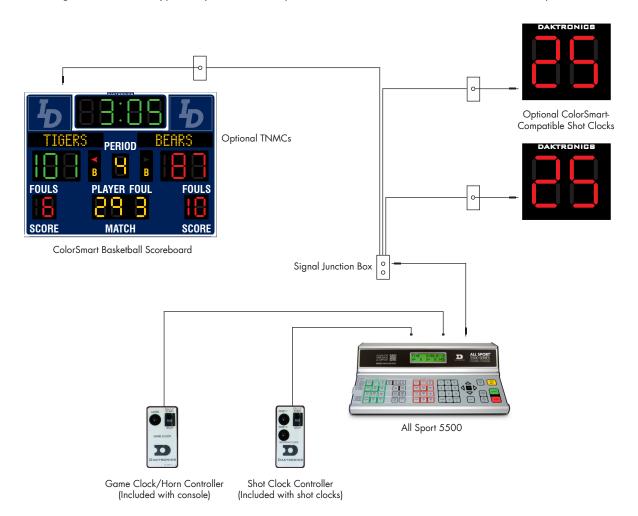
FOR ADDITIONAL INFORMATION

- Manual: See ED-16809

WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

201 Daktronics Drive, PO Box 5128, Brookings, SD 57006
Phone: 1-800-325-8766 or 605-692-0200 Fax: 605-697-4746
DD1189048 011817 Page 1 of 2

FEATURE	BENEFIT
ColorSmart® control	Incorporates Daktronics newest scoring protocol allowing for control of ColorSmart scoreboards, which change colors based on certain timing and scoring circumstances.
Cumulative memory	Saves points and fouls for up to 15 players per team in basketball mode and several user-defined player stats for volleyball for use on stat displays
Main & auxiliary scoreboard control	Control basketball shot clocks & stat displays in addition to the main scoreboard from the same output signal
Real-Time Data (RTD) output	Displays game-in-progress information on electronic message displays
Multiple sport modes	Easily move the same console from venue to venue
TNMC control	Display custom names for each team on scoreboards that support optional programmable Team Name Message Centers (TNMCs)

TYPICAL CONTROL DIAGRAM

Refer to the diagram below for a typical layout of an All Sport 5500 controller, basketball scoreboard and optional shot clocks.

Optional TNMCs

ColorSmart Basketball Scoreboard

Optional ColorSmart-Compatible Shot Clocks

Signal Junction Box

All Sport 5500

Game Clock/Horn Controller
(Included with console)

Shot Clock Controller
(Included with shot clocks)